JTC Sale of Site Industrial Development

Land Parcel at Jalan Papan (Plot 9)

Tender Ref: MLM-PLA-0000355

Technical Conditions of Tender



SALE OF SITE FOR BUSINESS 2 DEVELOPMENT ON LAND PARCEL ALONG JALAN PAPAN TECHNICAL CONDITIONS OF TENDER

	CONTENTS	PAGE
PART I	GENERAL	2
PART II	PLANNING GUIDELINES	3
PART III	DEVELOPMENT GUIDELINES	8
PART IV	TENDER SUBMISSION / OTHER REQUIREMENTS	10

PART I

1. GENERAL

- 1.1. The Jurong Town Corporation ("JTC") is inviting offers for lease by tender for the Land Parcel along Jalan Papan (Plot 9) ("the Land Parcel"). The lease of the Land Parcel is subject to these Technical Conditions of Tender and the Conditions of Tender for the Land Parcel.
- 1.2. The Successful Tenderer must in addition to the Conditions of Tender observe and comply with these Technical Conditions of Tender. The Conditions of Tender and these Technical Conditions of Tender are to be read together with the Control Plans of the Land Parcel supplied in the Tenderer's Packet.

PART II

2. PLANNING GUIDELINES

2.1. The planning parameters for the Land Parcel are:

PLANNING PARAMETERS	PROVISION / REQUIREMENT
Site Area	10,125.3 m ²
Land use/Zoning	The industrial component within the development on the Land Parcel shall be for any use or uses that are permitted by the Competent Authority under the Planning Act (Cap 232) for 'Business 2' zoning, in accordance with the Master Plan Written Statement.
	No dormitory use is allowed on the Land Parcel.
	The development shall be subject to the approval of JTC and all the relevant Competent Authorities. Please refer to Condition 5(b) of the Conditions of Tender for prohibited uses.
Permissible Gross Plot Ratio	1.4 (maximum)
(GPR) for the proposed development on the Land	1.12 (minimum)
Parcel	All tenderers are advised to carry out their own simulations to ascertain the achievable GPR prior to submission of their tenders.
Building Height (maximum) *	Maximum development height should not exceed 120m AMSL (Above Mean Sea Level).
	All tenderers should engage a surveyor to conduct site check of chimneys in the vicinity. The maximum development height of parts of the Land Parcel may be below 120m AMSL if affected by chimneys in the vicinity. If the site is affected by chimneys in the vicinity, the minimum chimney height (MCH) requirement as specified under paragraph 12.4 of the Singapore Standard on the Code of Practice for Pollution Control (i.e. SS593:2013) will have to be complied with.
Industrial Use Quantum	To comply with Development Control Guidelines issued from time to time by the Competent Authority under the Planning Act (Cap. 232).
Storey Height Control	To comply with Development Control Guidelines issued from time to time by the Competent Authority under the Planning Act (Cap. 232).

Planning Guidelines (Please refer to Annex A)		
Buffer and Setback Control	Min 5m along Road 7 inclusive of 3m green buffer and min. 4.5m along the Drainage Reserve.	
	No building setback requirement along common boundary. However, in the event development will need to provide building setback along common boundary (due to other agencies requirement e.g. Fire Safety Requirement) and the spaces within this building setback are not used for company's operation (e.g. driveway, parking lots, M&E), planting/greenery is strongly encouraged to be provided to contribute to the Green Cover requirement.	
Platform Level	Internal platform level of the building shall not be higher than +1.2m in relation to the access points of the adjoining road levels. Any differences between the building platform level, the covered / open walkway and the adjacent roadside pedestrian walkway shall be mitigated within the building line at the first storey.	
	The Developer shall consult all relevant agencies on the technical requirements of the proposed platform levels.	
Service Area	Service areas, including the refuse bin centre, electrical substation, MDF rooms, water tanks, fuel tanks, cooling towers, condensers, loading / unloading bays, holding bays, vehicular ramps shall be hidden from public view and shall be setback at least 24m or 2 column grids from the building line which ever is greater.	
	All M&E including electrical substation, MDF rooms shall be fully integrated within the overall building envelope. These areas shall be visually well-screened (on all sides) similar to the main building façade and / or visually concealed from public view with landscape design and/or using architecture elements.	
	There shall be no open storage on all sides of the development. All storage shall be housed and enclosed in the main building.	
Retaining Walls	Retaining walls shall not be allowed within the development. If required, they shall not be higher than 1.0m and shall be designed as part of a landscape feature or be designed with landscaping to soften their appearance.	

Carpark and Vehicular Ramp	Maximum of 5 surface parking lots shall be allowed along Road 7. All remaining car parking including heavy vehicular parking provisions shall be located away from Road 7 and shall be integrated/concealed within the building envelope or in multi storey carparks.
	along Road 7. Vehicular ramps and multi-storey car parks shall be visually concealed from public view with landscape and/or architectural treatment.
Pick-up/Drop-Off Point	The Pick-up/Drop-off (PUDO) shall be located within the development at the indicated location in the Control Plan. The PUDO shall be designed with sufficient queuing space within the development so as to ensure smooth flow of vehicles along the main road. No additional access point shall be located along Road 7.
	The drop-off point shall be well designed & integrated with the development's lobby and is strongly encouraged to be integrated within the overall building envelope to provide effective weather protection.
	Traffic calming measures shall be provided at the drop-off point to address safety concerns for the pedestrians and shall not obstruct pedestrian flow within the development.
Landscape Guidelines and Boun	dary Definition
Green Cover	To replace greenery lost due to the new development and to increase the greenery provision in Jurong Industrial Estate. the development shall achieve a minimum green cover of 30% of the total site area on ground and/or on the rooftop. Priority shall be given for greenery provision on ground. The green cover is defined as a tree canopy cover, rooftop greenery and any other forms of greenery which can be seen from above and captured by satellite image.
	In order to meet the green cover requirements, the Developer is strongly encouraged to explore the following treatments (but not limited to):
	 a) to select tree species with large canopies for green buffer and peripheral planting area to provide shades and higher contribution to green cover;

	b) to use grass cells for Fire Engine Access that are not used for day-to-day vehicular circulation;
	 c) to treat surface carpark lots and exposed hard surfaces with grass pavers or roof trellis with creepers; d) to provide green roof above standalone ancillary structures (e.g. guard house, bin centres, etc).
Landscape	Landscape within the green buffers shall be designed to respond sensitively to roadside pedestrian walkway and shall augment the roadside trees.
	Trees shall be planted at strategic locations to shade public activity areas and maximise the Green Cover. Plants and trees shall be permanent features (no potted plants are allowed) with integrated soil retaining areas. These shall be seamlessly integrated with various platform levels.
Boundary Definition	To enhance walking and cycling environment, fencing along Road 7 shall have maximum height of 1.5m and shall be visually porous. The proposed fencing along Road 7 is strongly encouraged to be located behind the green buffer and well- integrated with landscape. Exposed solid boundary walls shall not be allowed.
Facade and Building Envelope G	uidelines
Facade Treatment	The facades facing public roads should be aesthetically designed as this will not only enhance the environment but will also serve to project a good image for the development. External materials for these facades should be of good quality and easy to maintain.
	Use of materials that are environmentally responsive to the tropical climate is strongly encouraged for the facades. The facade design along Road 7 shall be aesthetically pleasing, presentable and easily maintainable. Colours chosen for the materials shall not be of predominantly bright colours where its intensity affects the visual sight of drivers. Low-quality awnings, covers or shelters shall not be allowed. Solid wall on the building facade along these frontages shall not be allowed. Proposed façade treatment along Road 7 shall continue and wrap around the building corner at least for 2 column grids.
	Building materials such as corrugated sheets, bare plaster and crimp or equivalent metal decking shall not be allowed on all

	building facades.	
Building Signage	All signages shall be integrated with the building façade and is subjected to JTC's approval and relevant authorities' guidelines. A large and elegantly designed company logo with hidden or integrated lighting is strongly encouraged along Road 7. All light fixtures, metal struts and brackets shall be visually well-screened/concealed from public view and the cluttering of signage for the building tenants and advertisement on the facade shall not be allowed.	
Other Requirements (if applicable)		
Vehicular Access	Please obtain approval from LTA for the proposed vehicular access, if it is different from the existing approved vehicular access point.	
Services	Please obtain services plans from Power Grid, Power Gas, PUB, Singapore Telecom and relevant authorities to ensure that your proposal will not affect the existing services (if any) within the site.	
Road / Drain / Sewer Line / Sewer Easement / Manhole	Please consult JTC on:	
	a) any engineering matter regarding the site allocation, if required; and/or	
	b) the status on availability (in terms of time frame) for the road, Sewer and other infrastructure works.	

PART III

3. DEVELOPMENT GUIDELINES

3.1. General Guidelines

Development Control

3.1.1. The Successful Tenderer shall comply with the Development Control Guidelines, Pollution Control Guidelines and any other guidelines that have been issued or may be issued from time to time by the Competent Authority.

Car Park

- 3.1.2. The Successful Tenderer shall provide parking spaces in accordance with the requirements under the latest Parking Places (Provision of Parking Places and Parking Spaces) Rules or any statutory modification and re-enactment thereto.
- 3.1.3. The design of the parking place (including the loading/unloading area) shall allow for adequate vehicle queuing length within the development for vehicles entering it. This is to prevent congestion along the main road.

Access Into JTC/State Land

3.1.4. For the purpose of entering JTC/State Land to do any works for the purpose of or in relation to the proposed development as may be required under these present Technical Conditions of Tender or Conditions of Tender, the Successful Tenderer shall obtain a prior written consent from JTC or Singapore Land Authority (SLA). The consent may be granted on such terms and conditions and subject to the payment of such charges and fees as JTC or SLA may determine.

Deviations from Planning Requirements

3.1.5. The requirements set out in this Part relating to location, height, size, area or extent of uses, etc. are specified with a view to achieve the relevant planning objectives as outlined or indicated in the provisions in this Part. The Successful Tenderer may submit for JTC's consideration alternative proposal to any such requirements. Where JTC is satisfied that the alternative proposal will also serve to achieve the planning objective relevant to the requirement, the Successful Tenderer may be allowed to adopt such alternative proposals instead in which event the relevant provisions in this Part shall be deemed to be complied with. JTC however reserves the absolute discretion to decide whether or not to allow any alternative proposal to be adopted.

3.2. Particular Guidelines

Vehicular Ingress/Egress

- 3.2.1. The proposed permanent access point for the Land Parcel shall be taken from Jalan Papan only, as shown indicatively in the Control Plan (Annex B).
- 3.2.2. The ingress/egress locations should be at least 30m away from the access of the adjacent plot. The exact location and the number of access point(s) shall be subjected to the requirements and approval of the Land Transport Authority (LTA).
- 3.2.3. The Successful Tenderer has to put in the necessary measures to ensure traffic safety (these measures may not be limited to putting in place traffic signage to remind motorists to slow down). Such measures are to comply with LTA's standard guidelines. The Successful Tenderer is encouraged to reduce the construction traffic during peak hours.
- 3.2.4. The vehicular access should have adequate sight distance of oncoming traffic, especially if it is near road bends.
- 3.2.5. Boundary walls/fences that are located near the egress (access) of the development shall be porous to ensure that motorists are able to view the pedestrian/cyclist activities at the gate, before exiting from the development.
- 3.2.6. The line of sight for vehicles entering/exiting the developments should be adequate and not obstructed/blocked by trees, guardhouses or boundary walls. If the line of sight distance is affected, any foliage/trees shall be relocated by the Successful Tenderer.
- 3.2.7. Please refer to the detailed requirements stated in Clause 7.0 under the Conditions and Requirements of Relevant Competent Authorities/Public Utility Licensees.
- 3.2.8. The Successful Tenderer shall submit to JTC and the Competent Authority for approval his proposed sub-division plan indicating the proposed boundary, size and gross plot ratio for each subdivided plot, the amount of gross floor area and the height of the buildings to be constructed on each subdivided plot, and the layout of the necessary infrastructure such as roads, ingress/egress points, drains, etc. to be constructed on the Land Parcel for the whole of the development.

PART IV


4. TENDER SUBMISSION / OTHER REQUIREMENTS

4.1. Plans of Proposed Development

- 4.1.1. Tenderers are <u>not required</u> to submit plans of the proposed development in their tenders for Land Parcel.
- 4.1.2. The Successful Tenderer shall after the acceptance of his tender by JTC submit plans of the proposed development to JTC (if and when required to do so) and all relevant Competent Authorities for approval.

4.2. CONQUAS Assessment of Construction Quality

- 4.2.1. The Successful Tenderer shall be required to refer and submit the proposed development to the Building and Construction Authority (BCA) to be assessed for the construction quality of the building works under the Construction Quality Assessment System (CONQUAS).
- 4.2.2. The Successful Tenderer shall for the purpose of this Condition comply with all requirements, procedures, directions and request of BCA and shall pay all fees, charges and other amounts payable to BCA for and in relation to the assessment of the construction quality of the proposed development under CONQUAS. The Successful Tenderer shall also render his full co-operation to BCA, its officers, employees and agents in relation to such assessment under CONQUAS.

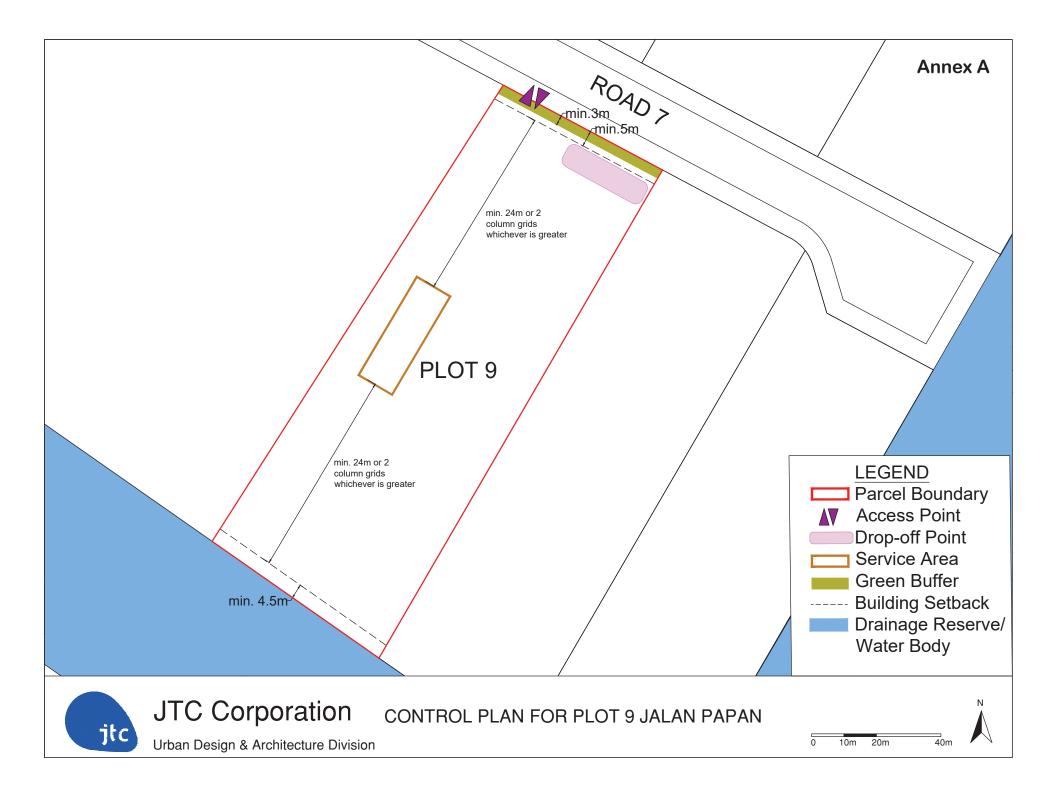



PLAN NO : JTC / JE18_R2_Y21_CONTROL PLAN DATE : 17.05.2021